



Motor Polumschaltung  
 2 Drehzahlen, 2 Wicklungen: Y/Y bzw. D/D  
 (T1-T2 Thermischer Motorschutz optional)

Pole change motor  
 2 Speeds, 2 windings Y/Y or D/D  
 (T1-T2 Thermal Motor protection optional)

Moteur à commutation de pôles  
 2 vitesses, 2 bobinages Y/Y ou D/D  
 (T1-T2 Protection thermique moteur)

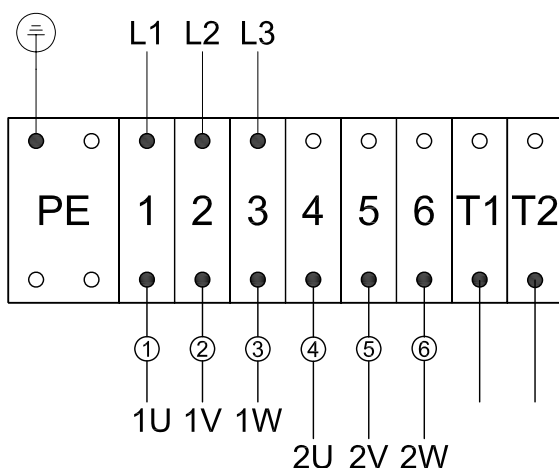

I: niedrige Drehzahl  
 I: Slow speed  
 I: petite vitesse

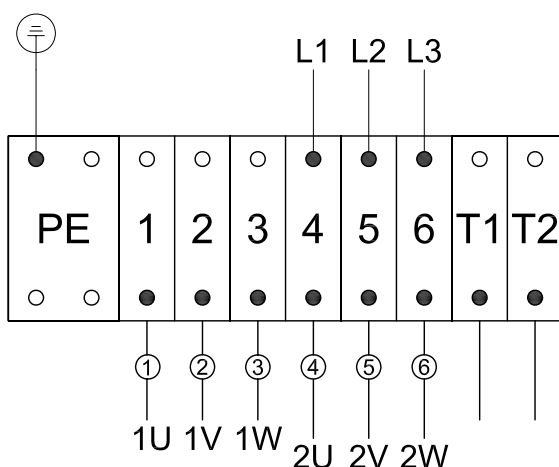

II: hohe Drehzahl  
 II: High speed  
 II: grande vitesse

	IEC / EN 60034-8	NEMA MG 1	Farbe	Colour	Couleur
Netzanschluß Supply lines Branchement réseau	L1 L2 L3	L1 L2 L3			
Motorwicklung Motor winding	1U 1V 1W	T1 T2 T3	schwarz blau braun	black blue brown	noir bleu marron
Enroulement du moteur	2U 2V 2W	T11 T12 T13	gelb rot violett	yellow red violet	jaune rouge violet
I	Niedrige Drehzahl	Low speed	Vitesse basse		
II	Hohe Drehzahl	High speed	Vitesse haute		
T1 T2	Thermischer Motorschutz	Thermal motor protection	Protect therm Moteur		